

# The Beacon™ Series Waist-High Optical Turnstiles

BE800-W

## Wood Cabinet • Interior Application

The Beacon™ Series is our line of barrier-free pedestrian control devices. Using a non-restrictive method to control traffic flow, these "optical" units are ideally suited for office personnel entrances where the majority of the people enter using an ID card. It allows for rapid pedestrian advancement and barrier free ADA access, while preventing "tail-gating" by those without credentials.

This low profile unit has a fine wood cabinet and is finished with a solid surface top to match any décor. It integrates with all standard access control equipment. (The "sister unit" is the BE800-S featuring a stainless cabinet.)

### Custom Wood Cabinetry

We can create custom wood cabinetry to match any decor. Select from these or call our team for more ideas.



### Solid Surfaces

These are just a few of the solid surfaces available for your turnstile's custom top.



BE800-W



8641 South Warhawk Road Conifer, CO 80433  
(303) 670-1099 x11 [Patrick.McAllister@Turnstiles.us](mailto:Patrick.McAllister@Turnstiles.us)

# The Beacon™ Series Waist-High Optical Turnstiles

BE800-W

## Wood Cabinet • Interior Application

### Applications:

This interior application optical unit features a finely crafted wood cabinet and is ideally suited for office personnel entrances where the majority of people enter using an ID card.

### Product Features:

#### Materials and Finishes:

Cabinets are crafted in your choice of wood finishes:


- White Wash, Maple, Birch, Oak, Walnut or Cherry
- Designer Tops are available in a wide variety of designer solid surface colors to match your interior design needs

### Design & Construction:

- Designed for reliable operation with aesthetics in mind
- Bollard construction : fine wood cabinetry in a choice of finishes
- Top surface: solid surface material in a variety of colors – a template is available for unique material requirements
- Optical sensors provide for passage for up to 30 people/minute
- Visual and Audible annunciation is provided status of passageway (open or closed), indication of valid card read, or alarm condition
- Horizontal graphic arrays (HGAs) solid state/ maintenance free
- Optical sensors to prevent unauthorized "crawling" thru lane
- Distinctive tones for valid card and alarm condition with adjustable volume control (82db max)/buzzer sounds on alarm condition
- Power Requirements: power supply input 100/120/220/230/240 VAC 50/60hz output – 24 vdc @ 2 amps per passageway
- Optical Unit measures: 26" long x 38" high x 7" wide

### Options:

- Optional console device can remotely monitor and control lane use
- Alarm outputs: n/c, n/o relay rated at 5 amp @ 24 vdc/auxiliary alarm output contacts provided for interface to building access control, fire/life safety, security, CCTV, and monitoring systems

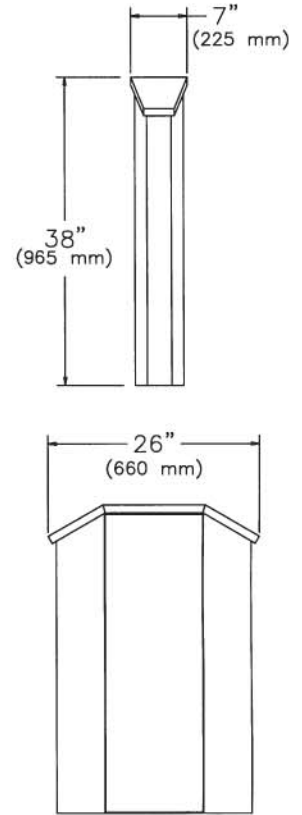

### Electrical Specifications:

Command module input 110-240 VAC (2 amp-1 amp) 50-60 Hz; control voltage 24 VDC. All electrical components are UL recognized and CSA certified.

### Standards and Codes:

Austenitic stainless steel:  
ASTM A240, A249, A276  
Hot rolled steel:  
AISI C-1020, AISI C-1018  
Hot dipped galvanizing:  
ASTM A-143, ASTM A-153-80  
Stainless steel fasteners:  
ASTM A-320  
American Welding Society (AWS)  
Standard D 1.1

### Warranty:

Units are warranted against defects in materials and workmanship for a period of one year from date of delivery. See warranty information for specific details.

